

# XP500

## 18"/46 cm

### Electric Blower with Explosion-Proof Motor

The XP500 Electric Blower are built with an UL/IECEX/ATEX-certified explosion-proof motor for use in areas where potentially explosive gases are unlikely to be present; establishing and ensuring a safer work environment.




Convenience and performance packaged together. The dual current XP500 can be powered by the fire truck circuit when performing PPV at the entrance of the building. With the flip of the switch, the fan is ready to be plugged into the house circuit for continued fume free ventilation indoors.

Equipped with PowerSteam® air straighteners that produce a powerful, straight, focused beam of air; allowing the fan to be set back further from a structure's entrance without sacrificing PPV performance.


### Specifications

<b>Model</b>	XP500
<b>Part</b>	EB90600X
<b>Weight</b>	72 lbs / 33 kg
<b>Impeller</b>	5-Blade
<b>Dimensions (h/w/d)</b>	23.5 x 21 x 18.5 in / 60 x 53 x 47 cm
<b>Motor</b>	1.5 Hp / 1.1 kW
<b>Amps (Start/Run)</b>	80A / 15A
<b>Noise</b>	97 dB@3' (1 m) / 95 dB@10' (3 m)
<b>Electric</b>	115V, 1ø, 50/60Hz
<b>Approvals</b>	CE

### CERTIFICATIONS

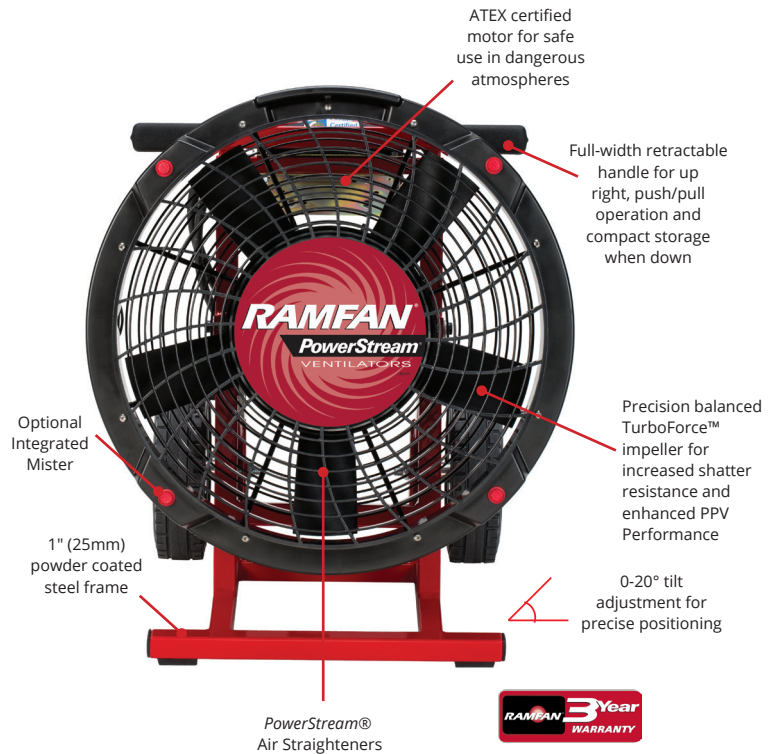


### Performance

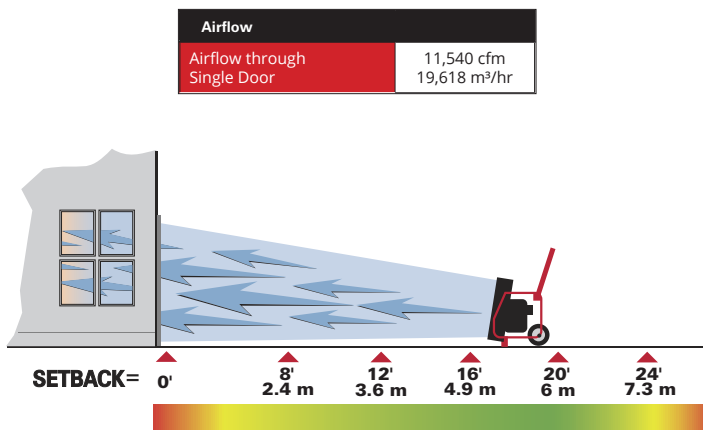

### Available Accessories

#### Integrated Misting System

Order # GH8112  
1.85 gal/min @ 100 psi  
7 l/min @ 6.9 bar



#### Duct Adapter/Converter

Order # GH2211



#### ECKO Flex™ with Carrying Bag

Order # FDT-1615BR  
16" (40cm) standard duct 15' (4.6 m), w/ carrying bag

Order # FDT-1625BR  
16" (40cm) standard duct 25' (7.6 m), w/ carrying bag



Non-collapsible, reinforced duct is constructed from flame retardant material and is crush resistant. Duct storage bag included with each duct purchase.

#### Conductive Duct

Order # FDT-1615CBR  
16" (40cm) conductive duct 15' (4.6 m), w/ carrying bag

Order # FDT-1625CBR  
16" (40cm) conductive duct 25' (7.6 m), w/ carrying bag

