

XP520

18"/46 cm

Electric Blower with Explosion-Proof Motor

The XP520 Electric Blowers are built with an UL/IECEx/ATEX-certified explosion-proof motors for use in areas where potentially explosive gases are likely to be present; establishing and ensuring a safer work environment.




Equipped with PowerStream® air straighteners that produce a powerful, straight, focused beam of air; allowing the fan to be set back further from a structure's entrance without sacrificing PPV performance. The XP520 offers superior ventilation with less equipment clutter and reduced noise inside the structure. The PowerStream FlowPath™ penetrates deeper through the structure than the traditional cone of air.

Specifications

Model	XP520
Part	EB90600X-230
Weight	72 lbs / 33 kg
Impeller	5-Blade
Dimensions (h/w/d)	23.5 x 21 x 18.5 in / 60 x 53 x 47 cm
Motor	1.5 Hp / 1.1 kW
Amps (Start/Run)	40A / 8A
Noise	97 dB@3' (1 m) / 95 dB@10' (3 m)
Electric	230V, 1Ø, 50/60Hz
Approval	CE

MOTOR CERTIFICATION


II 2 G EX d IIB Gb

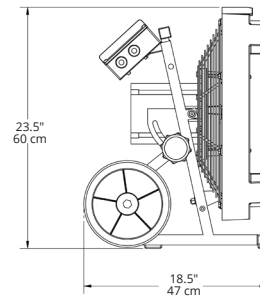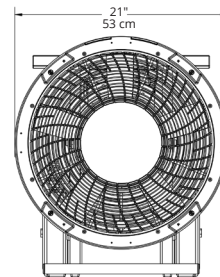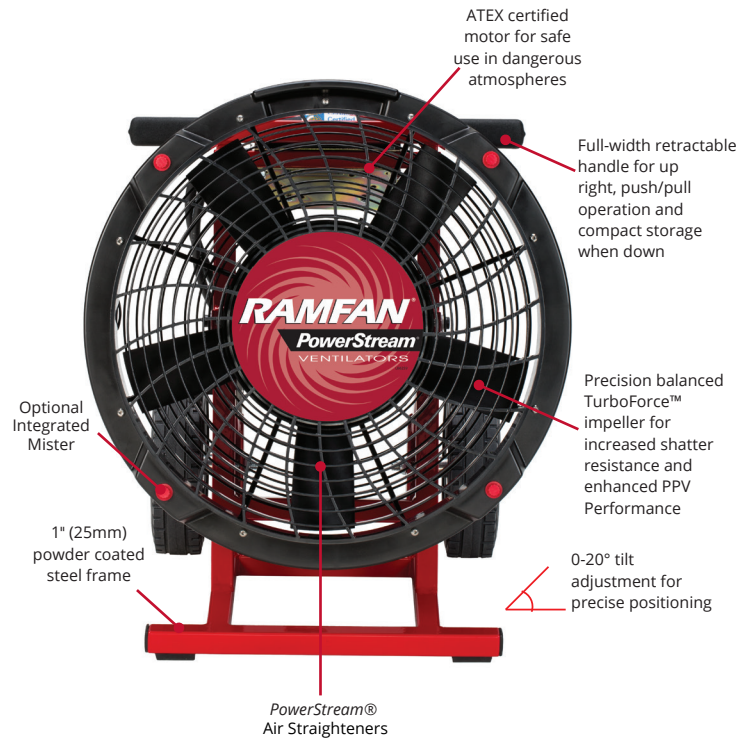

Performance

Tested in Accordance with AMCA 240


Airflow through Single Door	13,354 cfm 16,292 m³/hr
-----------------------------	----------------------------

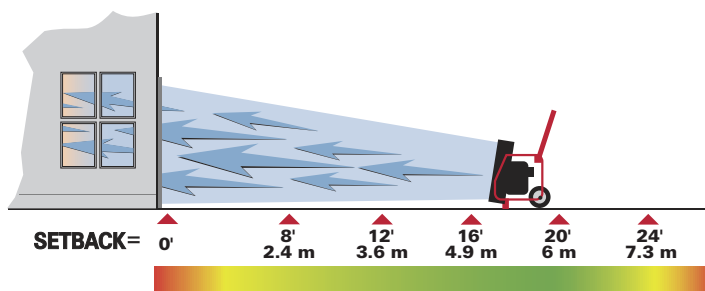

Available Accessories

Integrated Misting System

Order # GH8112
1.85 gal/min @ 100 psi
7 l/min @ 6.9 bar



Duct Adapter/Converter

Order # GH2211



ECKO Flex™ with Carrying Bag

Order # FDT-1615BR
16" (40cm) standard duct 15' (4.6 m), w/ carrying bag
Order # FDT-1625BR
16" (40cm) standard duct 25' (7.6 m), w/ carrying bag



Non-collapsible, reinforced duct is constructed from flame retardant material and is crush resistant. Duct storage bag included with each duct purchase.

Conductive Duct

Order # FDT-1615CBR
16" (40cm) conductive duct 15' (4.6 m), w/ carrying bag
Order # FDT-1625CBR
16" (40cm) conductive duct 25' (7.6 m), w/ carrying bag

